

Intertek
31690007



Intertek
31690007

ARNEG RESERVES THE RIGHT TO CHANGE OR REVISE SPECIFICATIONS AND PRODUCT DESIGN IN CONNECTION WITH ANY FEATURE OF ITS PRODUCTS. SUCH CHANGES DO NOT ENTITLE THE BUYER TO CORRESPONDING CHANGES, IMPROVEMENTS, ADDITIONS, OR REPLACEMENTS FOR EQUIPMENT PREVIOUSLY SOLD OR SHIPPED. CASE DESIGN CONDITION NOT TO EXCEED 75° F & 55% RH




USA

BRIONI 2 HI50

PAGE 2

CASE MODEL	CASE LENGTH (L) W/O ENDPANELS
100	36-7/8" (940mm)
135	49-1/4" (1250mm)
200	73-7/8" (1875mm)

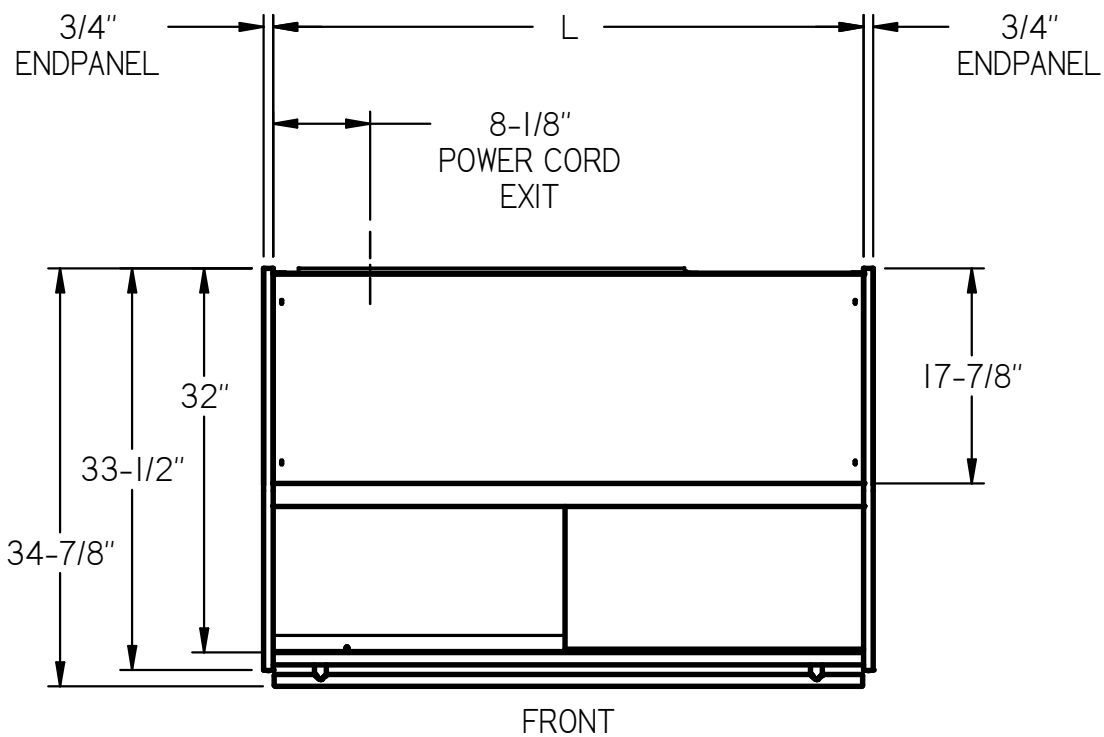

BRIONI 2 HI50

UPDATED:2/4/2019

REV 02



Intertek
31690007



Intertek
31690007

ARNEG RESERVES THE RIGHT TO CHANGE OR REVISE SPECIFICATIONS AND PRODUCT DESIGN IN CONNECTION WITH ANY FEATURE OF ITS PRODUCTS. SUCH CHANGES DO NOT ENTITLE THE BUYER TO CORRESPONDING CHANGES, IMPROVEMENTS, ADDITIONS, OR REPLACEMENTS FOR EQUIPMENT PREVIOUSLY SOLD OR SHIPPED. CASE DESIGN CONDITION NOT TO EXCEED 75° F & 55% RH



USA

Case Model	Fluorescent T8 Lighting Canopy		LED Lighting (Per Row)					
			Shelving (optional)		Canopy (Normal)		Canopy (Warm)	
	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
100	N/A	N/A	0.36	8.64	0.24	5.76	N/A	N/A
135	N/A	N/A	0.48	11.52	0.36	8.64	N/A	N/A
200	N/A	N/A	0.72	17.28	0.56	13.44	N/A	N/A

Electrical Characteristics

Case Model	Supply Voltage	Evaporator Fan Motor (Total)			Condenser Fan Motor (Total)			Anti-Mist Heaters (Total) (optional)		Defrost Heater			Water Tray Heater		
		Quantity	Amps	Watts	Quantity	Amps	Watts	Amps	Watts	Quantity	Amps	Watts	Quantity	Amps	Watts
100	120	1	0.18	21	2	0.35	42	0.41	49	1	2.08	250	1	6.25	750
135	120	1	0.18	21	2	0.35	42	0.56	67	1	3.33	400	1	6.25	750
200	220	2	0.19	42	4	0.38	84	0.46	102	1	3.64	800	2	6.82	1500

Compressor Characteristics @ 14 /+113°F (-10/ +45°C)

Case Model	Quantity	RLA Total Amps	Total Watts	Charge R404a (Kg/Oz)	Model
100	1	11.38	985	t.b.d.	NT6222GKV 115V/60Hz
135	1	12.08	1236	0,9 / 31,75	NT6226GKV 115V/60Hz
200	2	12.08	1992	t.b.d.	NT6222GKV 230V/60Hz

Case Total Power (Refrigeration)

Case Model	Supply Voltage	Total Amps	Total Watts
100	120	18.4	1804
135	120	19.2	2058
200	220	20.0	3631

Case Total Power (Defrost)

Case Model	Supply Voltage	Total Amps	Total Watts
100	120	9.10	1069
135	120	10.47	1222
200	220	11.59	2439

Circuit Requirements

Case Model	Supply Voltage	Phase	HZ	M.C.A. (Amps)	M.O.P. (Amps)	Nema Plug Type
100	115	1	60	22.3	30.0	5-30P
135	115	1	60	22.8	30.0	5-30P
200	220	1	60	23.7	30.0	6-30P

Case Length

Case Model	Case Length w/Ends (mm/ft)	Case Length No Ends (mm/ft)
100	937/3.07	977/3,20
135	1250/4.10	1290/4,23
200	1875/6.15	1915/6,28

Case Settings

Set Point	Differential
32°F	3,6°F

1. ArnegUSA refrigerated display cases for sale in the United States meet or exceed Department of Energy 2012 energy efficiency requirements.
2. Cases will be migrating to 449a



ARNEG RESERVES THE RIGHT TO CHANGE OR REVISE SPECIFICATIONS AND PRODUCT DESIGN IN CONNECTION WITH ANY FEATURE OF ITS PRODUCTS. SUCH CHANGES DO NOT ENTITLE THE BUYER TO CORRESPONDING CHANGES, IMPROVEMENTS, ADDITIONS, OR REPLACEMENTS FOR EQUIPMENT PREVIOUSLY SOLD OR SHIPPED. CASE DESIGN CONDITION NOT TO EXCEED 75° F & 55% RH